


ULTIMATE CONCEPT IN PACKAGING




Denso Packaging (India) Pvt. Ltd.

Manufacturer of Stretch/Cling, Masking, CPP Films, Sheets, Liners & other specialty Co-ex Films

**Palletization
Application**

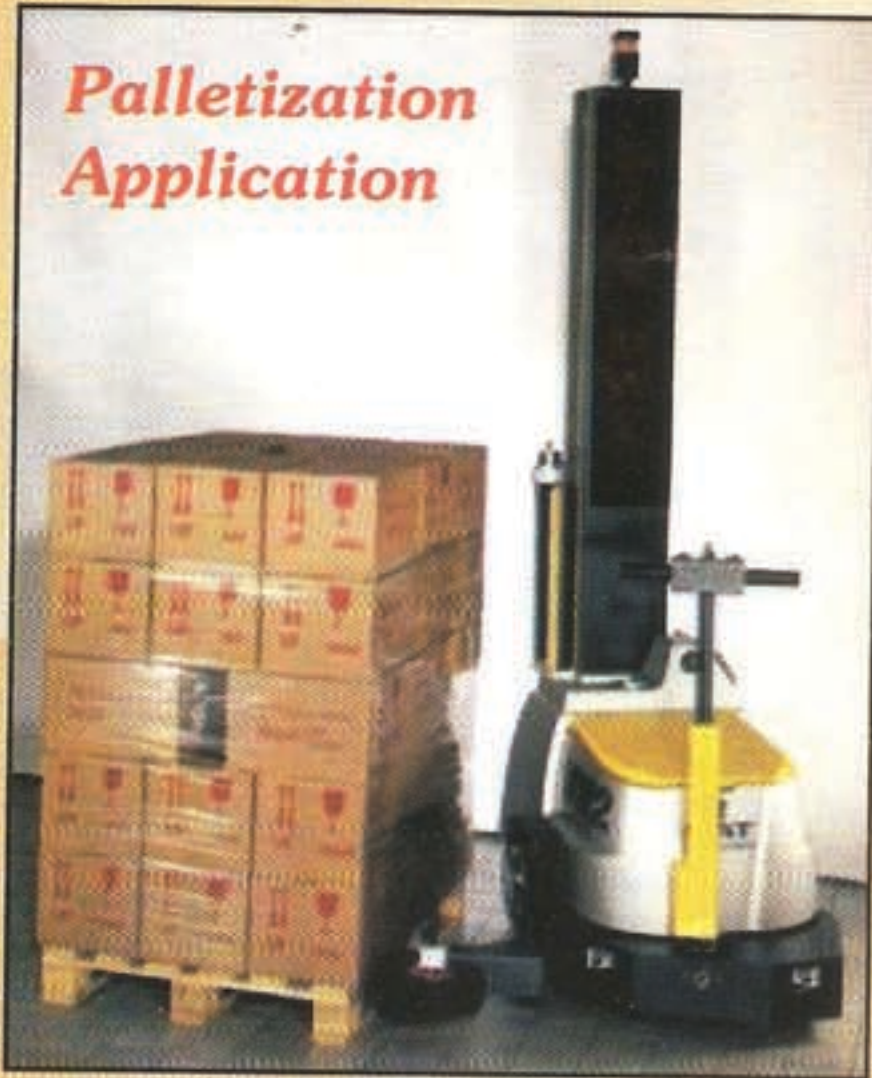

**Cartoon
Wrapping
Application**

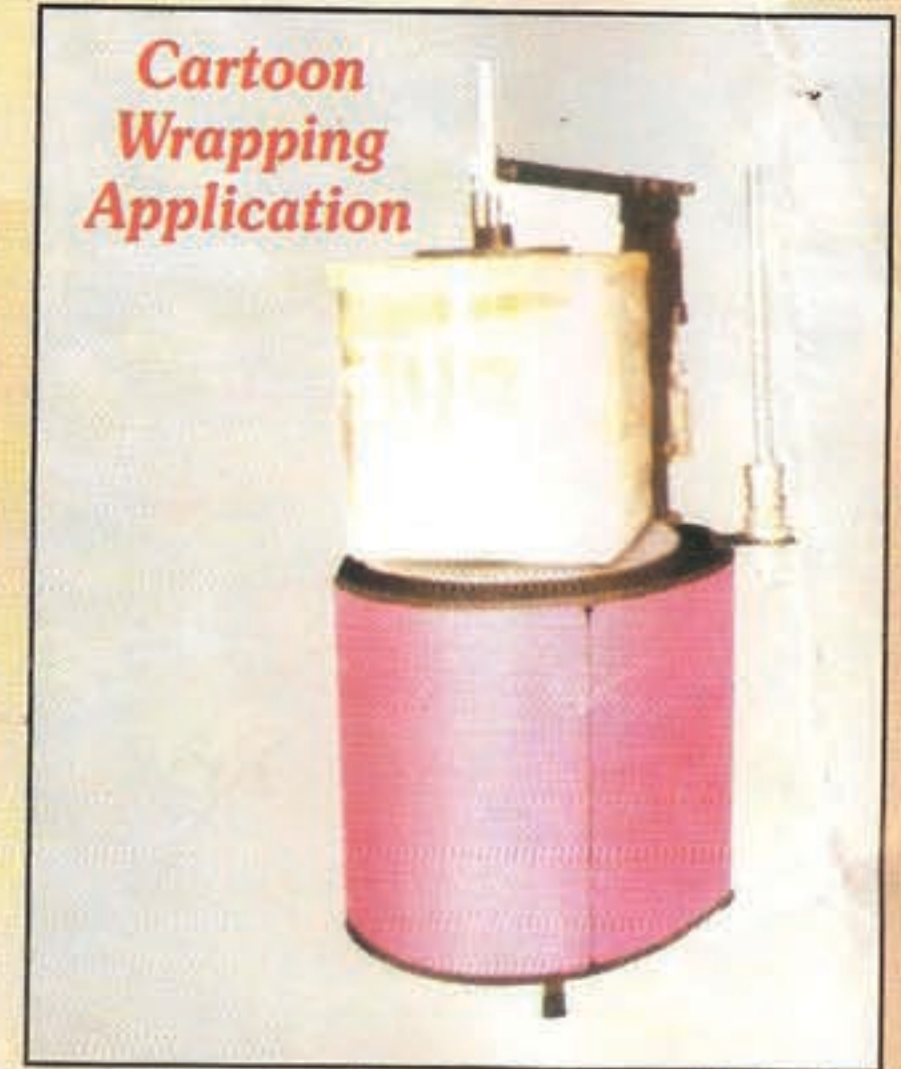

Denso Packaging (India) Pvt. Ltd.

Offers Multilayer Cast Stretch wrapping Film,
Masking Film and other speciality Co-ex Films manufactured on
the most advanced state-of-the-art Multilayer Cast Film Line. **DENSO**
provides films for a wide range of applications ranging from
food-packing to demanding industrial applications.

Whatever be your requirement we
have a solution for you.

STRETCH-CLING FILM APPLICATIONS



STRETCH FILM

APPLICATIONS

Stretch Wrapping films are used to pack several products like:

- ★ Palletized or non-palletized loads for domestic & export market.
- ★ Carton over wrapping.
- ★ Wire & Cables.
- ★ Cotton bales and synthetic yarn cones.
- ★ Paper rolls, Laminate rolls & Paper reams.
- ★ Extruded profiles - Aluminum, Glass, PVC.
- ★ Bundle wrapping cans/bottles of beer, Jam, Squash, Beverages.
- ★ Bundle wrapping of soaps, talcum powder containers, cosmetics.
- ★ Bundle wrapping of tin containers, tiles.
- ★ Electronics & electrical Control panels.
- ★ Protective packaging of consumer durables such as TV, Refrigerators etc.
- ★ Consolidation of goods for freight forwarding agents.
- ★ Tray wrapping of fresh fruits, vegetables, mushrooms, cheese, meat, fish etc.

ADVANTAGES

- ★ Adequate cling properties to ensure self sealing without the need of heat or adhesive tapes.
- ★ Single side cling prevent dust attraction.
- ★ High barrier properties to protect from dust, water and moisture even during storage and transport.
- ★ High puncture resistance ensures better safety of the packages. Withstands puncture of protruding separator boards and irregularly shaped loads, accepts cuts and snags without zippering.
- ★ High stress retentions maintains holding grip on load.
- ★ Protects fragile items from breaking.
- ★ Good tensile strength ensures light packaging and high retention force.
- ★ Very cost effective. Greater elongation results in higher yield per kg. and the lowest cost per pallet wrapped.
- ★ Excellent transparency and gloss ensures product visibility and easy inspection besides adding sales appeal apart from clear visibility of products.



MASKING FILM

Masking film is one side tack film which can be applied to the surface to be protected against scratches, dust & moisture. It sticks on the surface easily. No glue marks are left on the surface when peeled off. It helps product identification besides adding sales appeal to customers, high gloss superior tensile strength and better heat resistance.



APPLICATIONS

- ★ Polycarbonate sheets
- ★ Acrylic Sheets
- ★ PET Sheets



SPECIFICATIONS

STRETCH FILM	MACHINE GRADE	MANNUAL GRADE
THICKNESS	23 to 100 Micron	20 to 23 Micron
WIDTH	250 mm to 2000 mm	50 mm to 2000 mm
ROLL LENGTH	1000 mtrs. to 2500 mtrs.	100 mtrs. to 1000 mtrs.
CORE DIAMETER	76 mm ID	25-76 mm ID

LLDPE CLING FILM	
THICKNESS	12 to 15 Micron
WIDTH	150 mm to 450 mm
ROLL LENGTH	30 mtrs. to 600 mtrs.
CORE DIAMETER	25-76 mm ID

Stretch film is available in two formulations-Standard and Premium. Standard for manual warp and premium for machine wrap.

MASKING FILM	
THICKNESS	40 to 70 Micron
WIDTH	Upto 2000 mm
ROLL LENGTH	As Per Customer Requirement
COLOR	Natural & White Opaque

Specifications are subject to change.



Denso Packaging (India) Pvt. Ltd.

Regd. Office & Works : B-268, Phase-I, Mangol Puri Industrial Area, Delhi-110083
 Ph. : 011-27917558 Telefax : 011-27917557 E-mail : sales@densopkg.com
 Unit-II : Plot No.11, Sector-7, I.I.E., SIDCUL, Pant Nagar, Distt. U.S. Nagar, (Uttarakhand)
 E-mail : mrawat@densopkg.com